




GIP

1008 Horizontal Shaft Impact Crusher

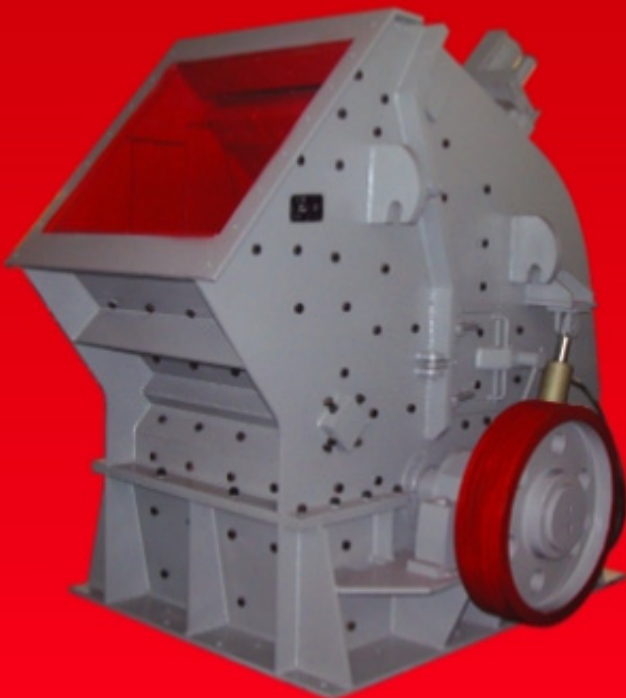

The Affordable Alternative in New Crushing Equipment

Standard Features

Heavy-duty, high inertia, semi-enclosed, balanced rotor

Newly designed wedge type rotor, should make blowbar removal safer and easier

Specially designed, impeller bar design to allow extended life

Rotor locking system for safer and quicker rotor maintenance

Large self-aligning spherical roller bearings with labyrinth seals

Hydraulically opened rear section for easier access to rotor and impact curtains

Hydraulically adjustable impact curtains

Quick and accessible breaker bars for easy replacement and repositioning

Inspection doors in key areas

Large, clear discharge opening

Optional Features

Electric motor

Motor drive sheave and bushing



The Affordable Alternative in New Crushing Equipment

Specifications

Feed opening (length x width).....	35" x 32"
Maximum feed size	12"
Production range	75 to 125 TPH
Required horsepower	75 ~ 100 HP
Rotor speed range	500 to 750 RPM
Rotor width	34"
Rotor diameter	40"
Discharge setting	2" minus
Approximate weight	21,200 LBS

Impeller bar	
Number	4
Weight.....	474 LBS each
Breaker plate liners	
Number	30
Weight.....	43 LBS each
Bearing size	160 mm



Design & Specifications Subject to Change Without Notice

November 2007

11020 Cherry Avenue, Fontana, CA 92337
 Tel: (909)823-1688 Fax: (909)823-6868