


GIP

1013N Horizontal Shaft Impact Crusher

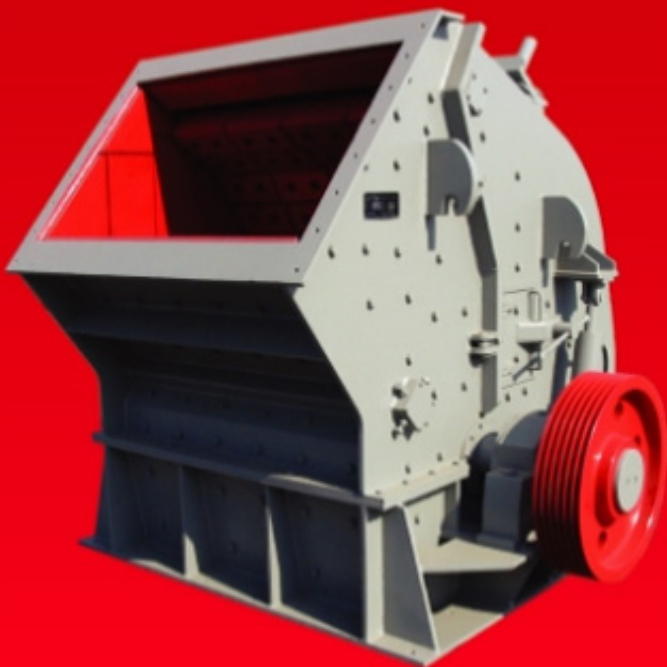

The Affordable Alternative in New Crushing Equipment

Standard Features

Heavy-duty, high inertia, semi-enclosed,
balanced rotor

Newly designed wedge type rotor, should make
blowbar removal safer and easier

Specially designed, impeller bar design to allow
extended life

Rotor locking system for safer and quicker rotor
maintenance

Large self-aligning spherical roller bearings with
labyrinth seals

Hydraulically opened rear section for easier
access to rotor and impact curtains

Hydraulically adjustable impact curtains

Quick and accessible breaker bars for easy
replacement and repositioning

Inspection doors in key areas

Large, clear discharge opening

Optional Features

Electric motor

Drive sheave and bushing



The Affordable Alternative in New Crushing Equipment

Specifications

Feed opening (length × width)	55" × 32"
Maximum feed size	16"
Production range	100 to 150 TPH
Required horsepower	200 HP
Rotor speed range	500 to 800 RPM
Rotor width	54"
Rotor diameter	40"
Discharge setting	2" minus
Approximate weight	28,600 LBS

Impeller bar

Number 8


Weight 378 LBS each

Breaker plate liners

Number 40

Weight 51 LBS each

Bearing size 180 mm

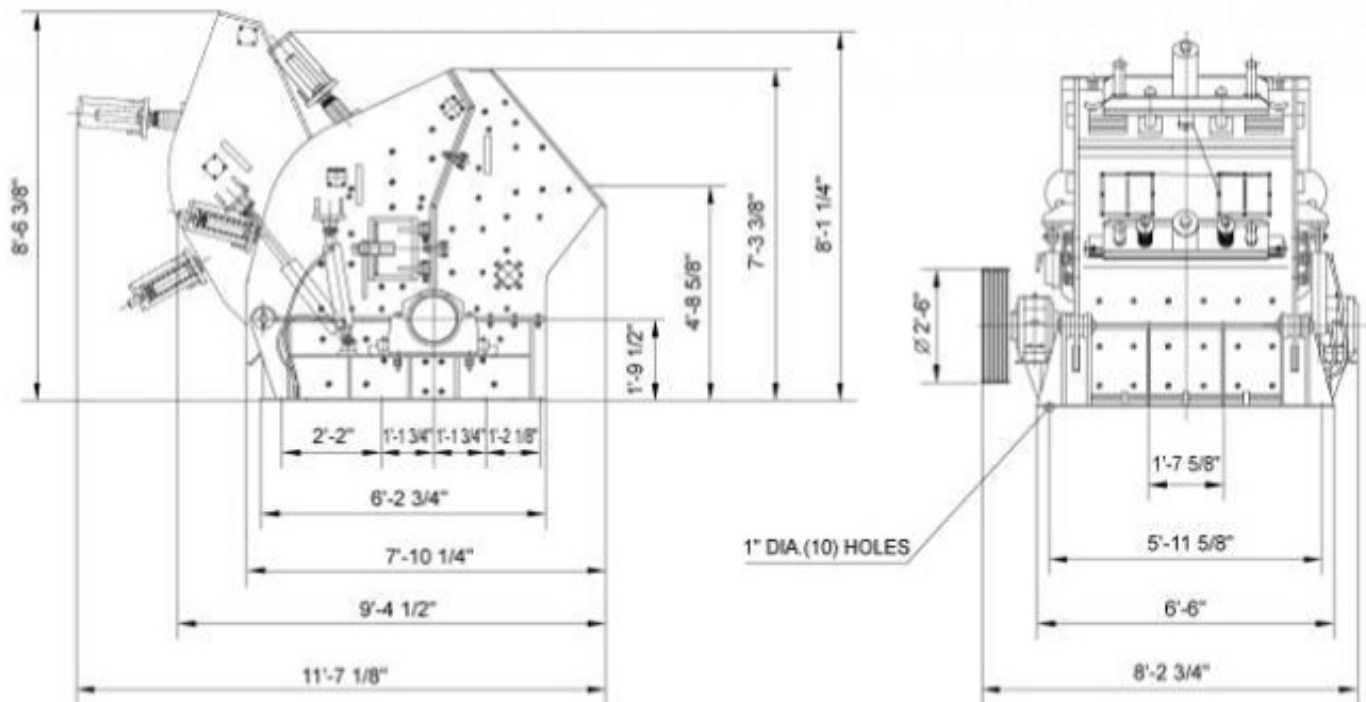

Design & Specifications Subject to Change Without Notice

November 2007

11020 Cherry Avenue, Fontana, CA 92337
Tel: (909)823-1688 Fax: (909)823-6868